


MCT Brattberg HandiPlug

Data Sheet

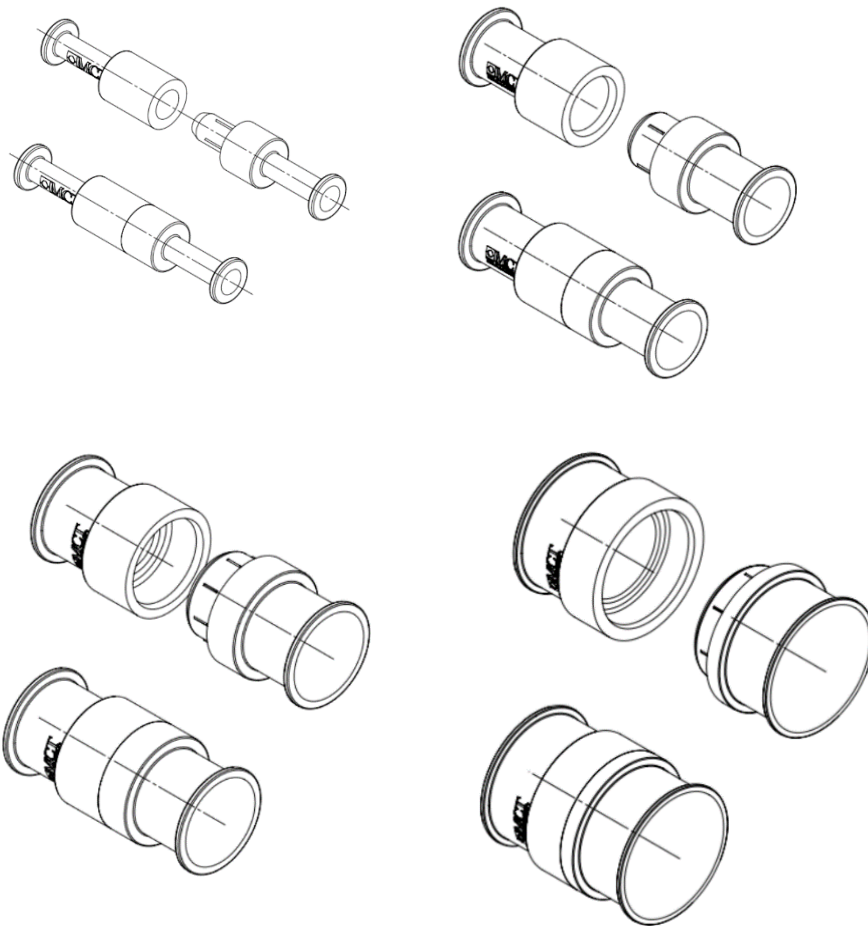

HandiPlug is used with the HandiBlock to act as a spare module.

Putting safety first

Data.	
Trade name:	MCT Brattberg HandiPlug
Variations	HB20; HB30; HB40; HB60
Material:	GRP (Glass Reinforced Polymer)
Color:	Black
Working temperature:	-60 to +90 Degrees Celsius
Surface Treatment	No surface treatment
Flammability	V0, acc UL 94
Percentage of filler	30wt% Glass fibre
Smoke index:	81.4
Mean Toxicity Index	0.63 Per 100g Sample, Defence Standard 02-713 Issue 3
Chemical compatibility.	
Water:	Excellent
Oil:	Excellent
Ozone:	Not recommended
Sea water:	Excellent
Methanol:	Good
Chlorine:	Not recommended
Diesel:	Good
Gasoline:	Good
Acid:	Not recommended

HandiPlug is halogen free and flame retardant.



www.mctbrattberg.com

MCT Brattberg AB
SE-371 92 Karlskrona
Sweden
Phone: +46-455 37 52 00
Fax: +46-455 37 52 90
E-mail: info@mctbrattberg.se
Website: www.mctbrattberg.se

MCT Brattberg Ltd
Commerce Street
Carrs Industrial Estate Haslingden
Lancashire BB4 5JT
England
Tel: +44 - 170 624 4890
Fax: +44 - 170 624 4891
E-mail: info@mctbrattberg.co.uk

MCT Brattberg Inc.
P.O. Box 374
Spring Tx 77383
USA
Phone: +1 (281) 355 8191
Fax: +1 (281) 355 8393
E-mail: info@brattberginc.com